


Sullivan Gulch: Cross Section looking Northwest

Simplified cross section showing high grade results and interpreted vein zones relative to the proposed pit shell.

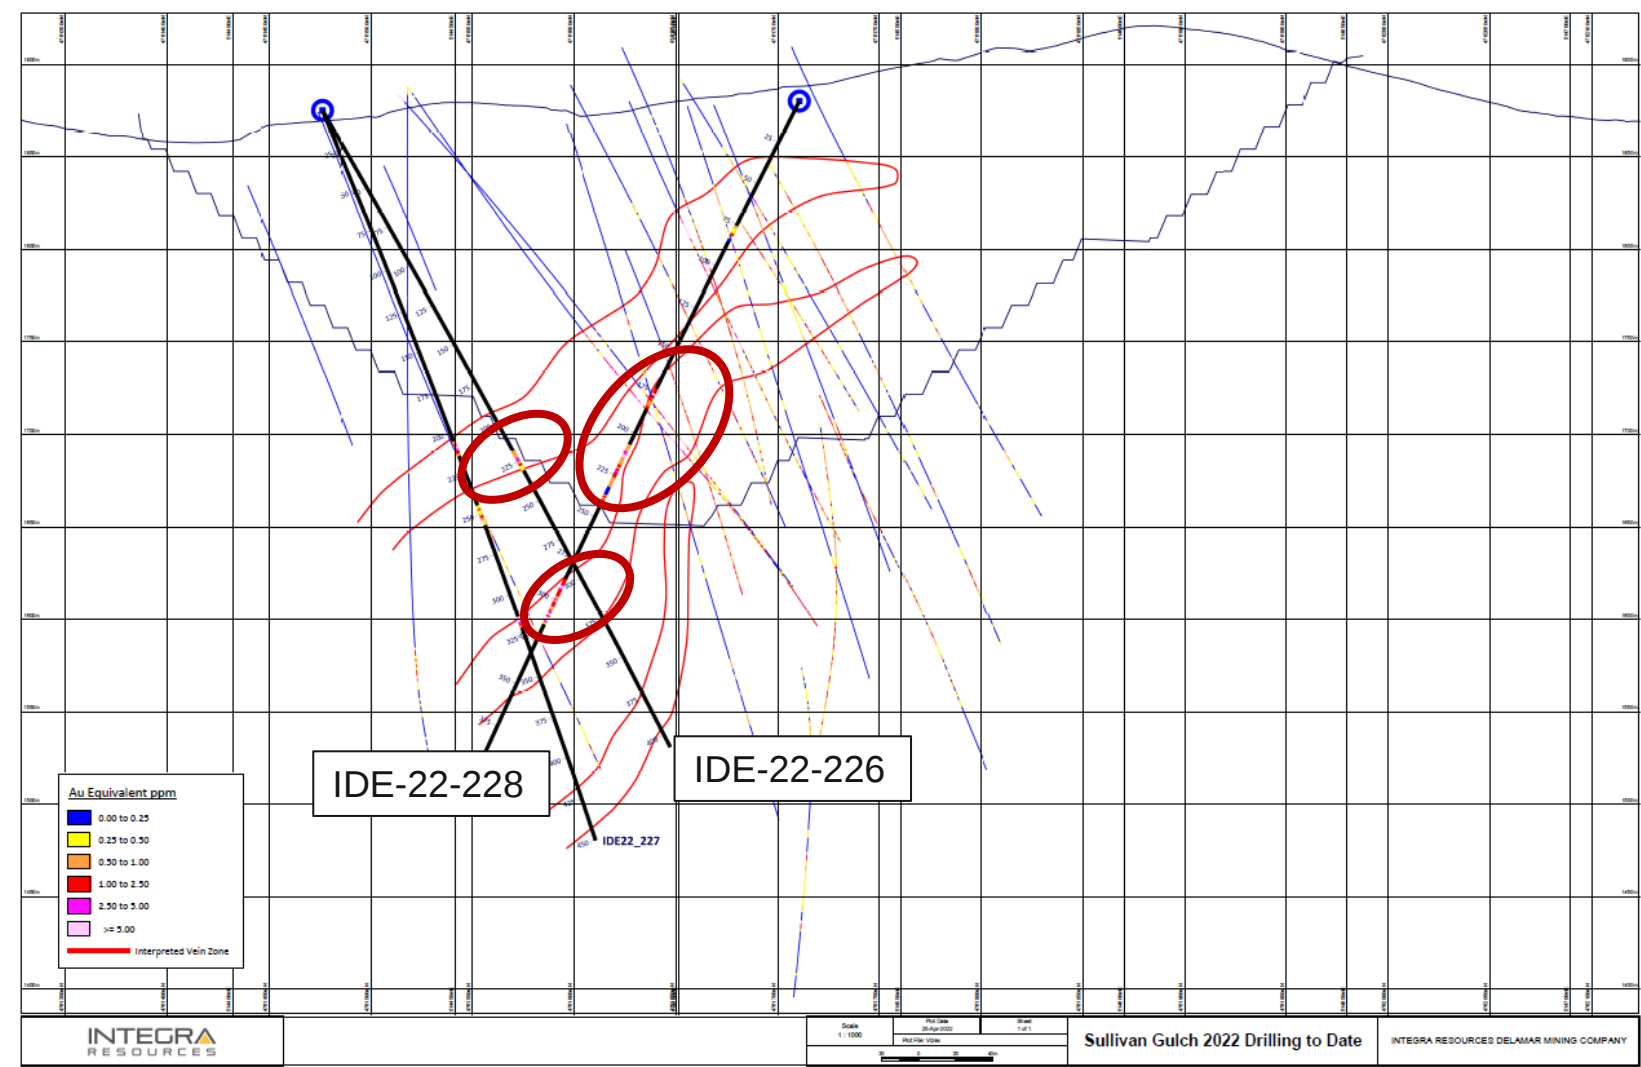

Drill Hole	From (m)	To (m)	Interval (m)	g/t Au	g/t Ag	g/t AuEq
IDE-22-226	192.63	243.23	50.60	0.57	47.79	1.18
including	203.61	205.13	1.52	1.02	234.00	4.03
including	223.11	225.13	2.02	0.99	293.00	4.76
IDE-22-226	253.90	282.85	28.95	0.73	5.47	0.80
including	258.47	261.52	3.05	2.88	7.47	2.98
IDE-22-226	308.76	406.30	97.54	1.09	70.17	2.00
including	310.29	311.81	1.52	6.57	1,406.00	24.67
including	331.62	333.15	1.53	5.53	96.92	6.77
including	337.72	340.77	3.05	1.85	266.50	5.28
including	349.91	351.43	1.52	7.62	263.00	11.00
including	354.48	357.53	3.05	4.40	192.00	6.87
including	372.77	374.29	1.52	7.32	368.00	12.06
IDE-22-228	27.13	120.40	93.27	0.27	30.61	0.66
including	34.44	35.97	1.53	0.49	260.00	3.84
including	40.54	42.06	1.52	0.19	378.00	5.05
including	81.69	81.99	0.30	0.47	834.00	11.21
IDE-22-228	173.13	185.17	12.04	0.91	53.98	1.60
including	176.17	177.24	1.07	2.87	74.17	3.83
IDE-22-228	206.65	243.23	36.58	0.99	36.84	1.46
including	211.23	214.27	3.04	3.74	201.90	6.34
including	222.35	223.57	1.22	2.16	82.90	3.23
including	241.10	242.32	1.22	4.29	22.08	4.57
IDE-22-228	287.43	314.40	26.97	4.10	446.92	9.85
including	290.78	293.68	2.90	3.59	121.81	5.16
including	299.22	299.92	0.70	1.79	218.00	4.60
including	303.89	304.56	0.67	9.04	9.17	9.16
including	307.70	313.33	5.63	13.47	1,909.45	38.05
including	308.70	309.10	0.40	80.40	1,4054.00	261.28
including	309.98	310.74	0.76	40.74	2,839.00	77.28

- (1) Downhole thickness; true width varies depending on drill hole dip; most drill holes are aimed at intersecting the vein structures close to perpendicular therefore true widths are close to downhole widths (approximately 70% conversion ratio)
- (2) Gold equivalent = g Au/t + (g Ag/t ÷ 77.70)
- (3) Intervals reported are uncapped